

# INSTINCT Griddle

Induction grill (table-top), single zone 493 x 352 mm

## Models

☐ INSTINCT Griddle 3.5    ☐ INSTINCT Griddle 5



INSTINCT Griddle 3.5/5

- Realtime Temperature Control System RTCSmp
- Temperature setting from 50–230°C
- Special induction non-stick griddle
- Timer function
- Specially energy efficient
- Specially short heat-up time
- Completely uniform heat distribution
- Instantaneous control of the frying temperature with no lag
- Convenient and reliable


## Properties

- Significantly reduced energy consumption thanks to high-efficiency induction technology with optimised energy transfer between the griddle and the food product
- Specially developed induction griddle with HPCR stainless steel surface protection
- Contactless multi-point temperature measurement and temperature control accurate to one degree over the entire cooking time and the entire cooking surface for optimal frying results thanks to RTCSmp technology.
- Convenient frying without heating up the surroundings thanks to direct heat transfer from the griddle to the food product by means of induction
- Especially high operational safety and reliability due to numerous protective features
- Short heat-up time from 20 – 200 °C in 3 ½ minutes with 5kW and 4 ½ minutes with 3.5 kW
- Easy to clean thanks to a removable, washable and reusable air filter
- Exceptionally robust and developed for continuous operation in the restaurant industry
- Reduction of the maximum power from 100 % to 25 %
- Mains voltage detection and automatic loading of the optimal parameters
- Single-phase version (up to 3.5 kW) at 208 V – 240 V: identical worldwide
- Warranty: 2 years on all parts

## Included Features

- RTCSmp control/monitoring
- Height-adjustable, locking feet
- Washable air filter insert
- Spatter guard
- Spatula
- Stainless steel sponge



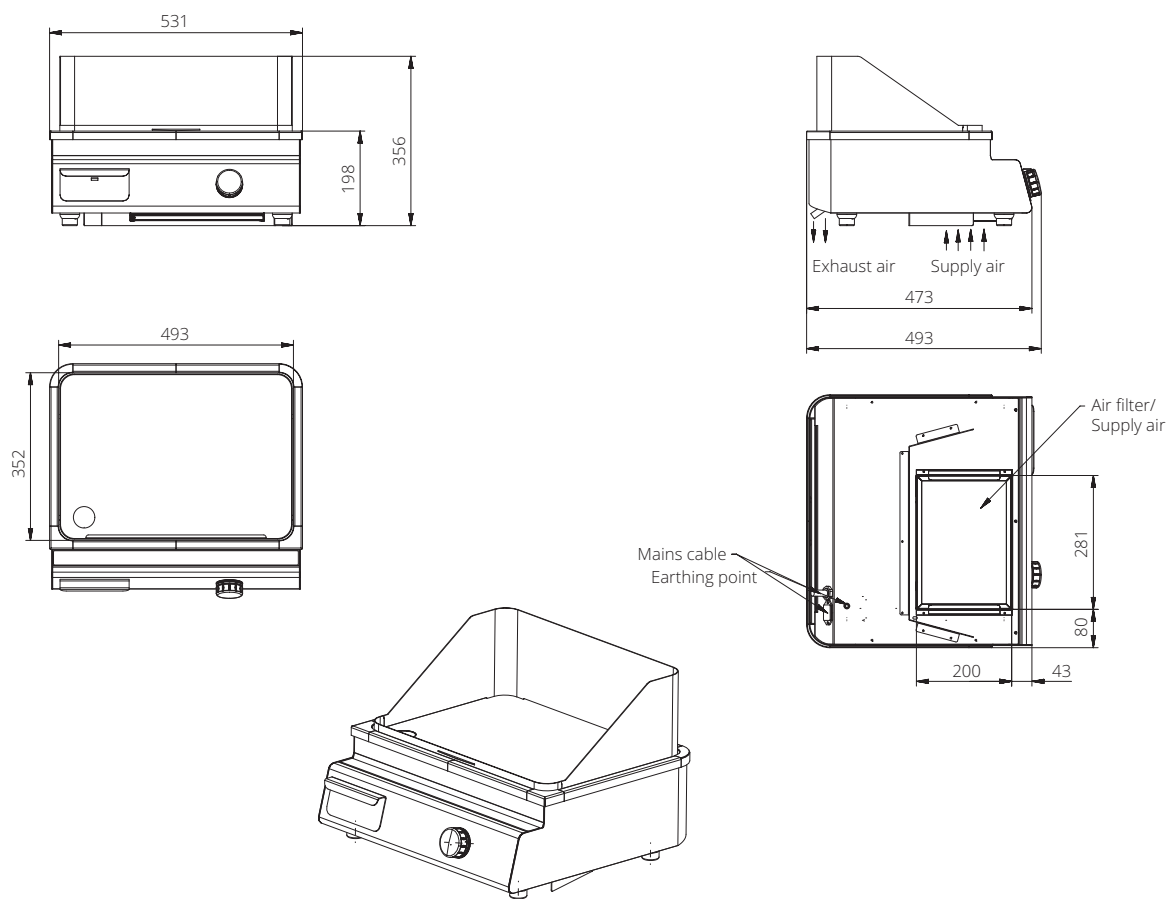

All dimensions in mm

Number of zones	1
Griddle B x D	493 x 352 mm
Temperature setting	50 to 230°C
Housing	Stainless steel

Model	INSTINCT Griddle 3.5	INSTINCT Griddle 5
Power, watts	1 x 3500	1 x 5000
Electrical supply V/Hz	208-240/50-60/1	380-440/50-60/3 208/50-60/3
Dimensions B x D x H mm	531 x 493 x 198 mm	531 x 493 x 198 mm
Weight, kg	28	30